

SkyLIGHT™ VCX Controller

Full test set functionality in the smallest possible form factor.

Beyond Loopbacks



wire-speed traffic generation

Beyond Reflectors



full mesh, bi-directional performance monitoring

Beyond Counters



per-flow bandwidth utilization

VIRTUALIZE



Leading the Virtual Instrumentation Revolution

SkyLIGHTi VCX Controller is the industry's first performance assurance controller employing Network Function Virtualization (NFV) to bring advanced monitoring capabilities network-wide, without the need for expensive, high-end test equipment.

This radically more efficient approach to network performance monitoring combines all the benefits of virtualization without compromising test speed or precision. By eliminating key cost, scalability, and coverage barriers to network performance visibility, service providers can now more cost-effectively ensure a better quality of experience (QoE) for users.

The VCX Controller works together with Accedian's Nano smart SFP (optical transponder) and compact gigabit Ethernet modules to deliver multi-flow traffic generation and ability to monitor the performance of thousands of flows. The modules are easy to install and cost up to 90% less than existing solutions, enabling service providers to realize the significant capital and operational efficiencies promised by an NFV architecture, while their customers benefit from a fully assured network.

Designed to fit seamlessly into a service provider's existing infrastructure, operational practices and procedures, the VCX Controller uses the same interfaces as Accedian standalone solutions to interoperate openly with standards-based network elements, management platforms, analytics platforms, and more.

The result combines centralized control with distributed firepower. This approach is unique in its scalability, and its ability to openly interface network-wide intelligence with existing infrastructure, management, and control platforms.

Don't Promise Performance. Deliver It.

The SkyLIGHT VCX Controller offers enhanced network performance, Quality of Service (QoS) and Quality of Experience (QoE) visibility - at a fraction of the cost of traditional solutions. Applications as diverse as virtualized customer premises equipment (vCPE), mobile network monitoring, and financial services transaction assurance can all be implemented simply, quickly, and ubiquitously.

Leading the Virtual Instrumentation Revolution

The most powerful performance assurance DNA **fused** with the power of the cloud



A radically efficient approach to performance monitoring

- **Distributed firepower:** programmable, compact hardware modules
- **Centralized intelligence:** NFV-powered by the VCX Controller


Virtualize Without Compromise

With performance assurance virtualized network functions (VNFs) powered by the VCX, hardware modules surpass the capabilities of standalone network interface devices (NIDs) without sacrificing performance or precision. Accedian Modules offer more wirespeed processing power and precision than network elements many times their price. Imagine thousands of performance monitoring sessions managed by a single module, with microsecond precision and no impact to inline traffic. It's available today.

Virtualized Performance Assurance

The VCX Controller was crafted from the code, packet processing technology, and over forty patents that Accedian introduced to transform vanilla network interface devices into fully capable Network Performance Elements.

Virtualizing these exceptional devices was a natural process. Accedian's engineering team migrated management, test control and results processing functions—already running on Linux on each Element's CPU—to a centralized controller, while porting wire-speed processing to the latest generation of FPGA¹ programmable processors employed in Accedian modules.

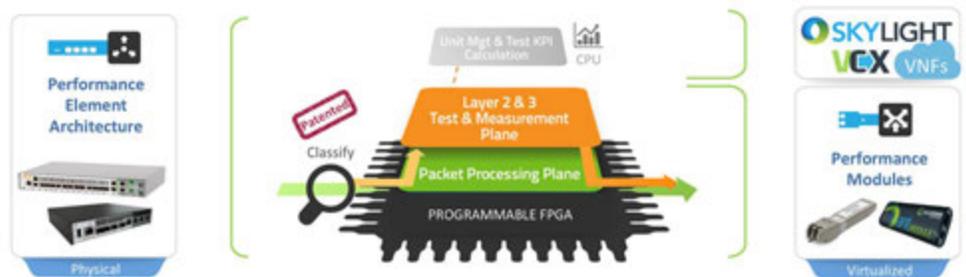

The Performance Assurance Specialists

Accedian Performance Elements are installed worldwide to establish, enforce, and assure network performance.

Over 300,000 service endpoints, in hundreds of service provider networks, rely on Accedian hardware to deliver the best possible quality of service.

We built the VCX on expertise gained by working closely with operations, product, and technology teams at these leading operators.

In this way, the VCX Controller assumes CPU functionality for thousands of Performance Modules, each acting as a remote port. The VCX also maintains synchronization information for each endpoint, permitting highly precise one-way measurements over a variety of remote locations.

Each Module can perform service activation testing (SAT), traffic conditioning, standards-based OAM, and performance monitoring (PM) under the control and command of the VCX. Accedian's patented dual-plane packet processing architecture is retained in the Module design, allowing these miniaturized devices to generate full line-rate test traffic, and maintain thousands of PM sessions per unit. The result encompasses the functionality of Accedian Performance Elements and PM Actuators in the smallest possible form factor, at a fraction of the cost.



Easy Operations Integration



Modules become the data plane extension of the VCX Controller, which otherwise appears to be a single Performance Element with each port representing a deployed Module. The web interface, command line interface (CLI), and other attributes are nearly identical to Accedian Performance Elements, simplifying the migration to virtualized Modules and ensuring uniform management of mixed deployments.

¹ Field Programmable Gate Array

The VCX Controller as... The Next Generation V-NID Actuator

The VCX acts as the next generation V-NID Actuator, providing higher capacity and flexible deployment options, while fully supported by existing V-NID Manager installations. In Actuator applications, one or more Modules are installed at the desired test origins, allowing a single VCX appliance to power multiple virtual actuator+locations.

Service providers with V-NID Actuator probes installed in their networks can elect to upgrade their existing hardware to run the VCX, enhancing existing V-NID Actuator functionality and enhancing its scalability. Existing V-NID customers should contact their Accedian sales director for a complete overview of the seamless migration options available.

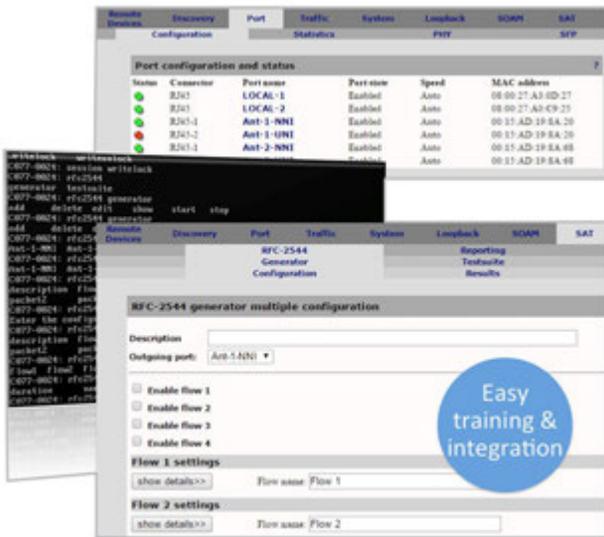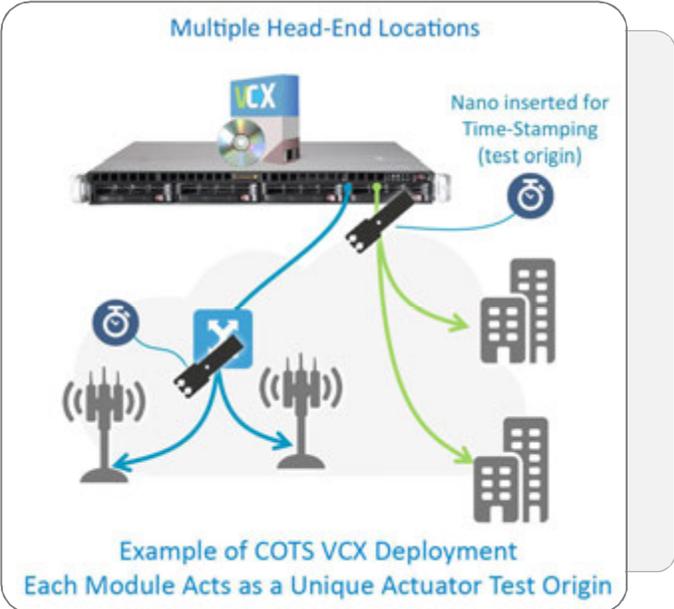

Service providers can continue to use existing management practices, platforms, and procedures without IT investment or retraining of network operations or field personnel.

Logging into the VCX, or controlling it with Accedian's proven CLI, provide a familiar experience to personnel accustomed to deploying standalone vCPE hardware.

VCX-powered modules also feature the Plug & Go zero-touch provisioning functionality that was developed to support large-scale Element deployments over a wide range of network architectures and topologies.

Plug & Go works over all existing Layer 2 and 3 networks, and supports all common addressing schemes, including DHCP-assigned and dynamic IP addresses. Modules also feature a patented IP-agnostic mode that uses the IP address of a connected device.

Without equipment to rack, power, and configure Modules can be customer self-installed with instructions simpler than connecting a cable modem - no truck rolls required. This offers simplified remote customer care, and greatly reduced human error.

Unifying Physical & Virtualized Instrumentation

With its familiar interface and full interoperability with Accedian Performance Elements and Actuators, standards-based network elements, reflectors and software agents, Modules under control of the SkyLIGHT VCX cost-effectively contribute to network-wide performance assurance visibility over multi-vendor networks.




A Uniform Instrumentation Layer for Multi-Vendor, Multi-Technology Networks

Cloud-Sized Scale: 1,000s of sessions per VCX

SkyLIGHT Performance Platform Architecture

The VCX Controller hosts critical management and virtualization functions within the overall SkyLIGHT architecture. Performance assurance VNFs are hosted within VCX Controller instances, permitting simplified chaining of functions as well as distributed NFV (D-NFV) hosting options.

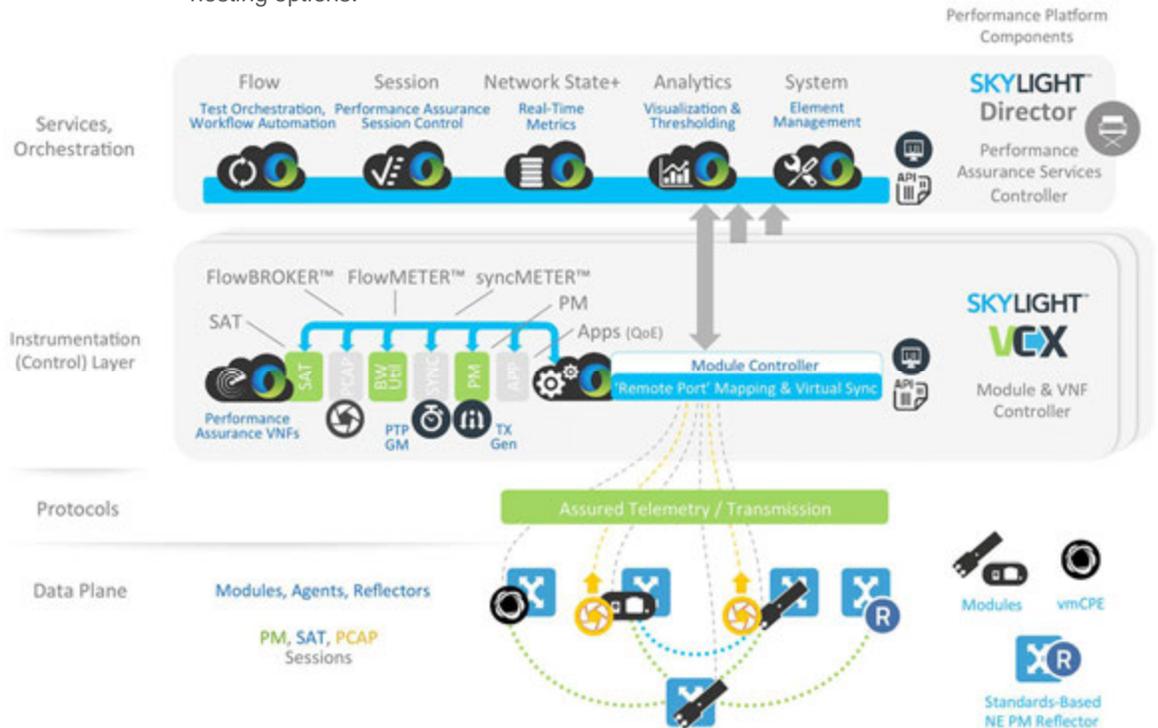

Virtualization Speeds Innovation

The SkyLIGHT Architecture is the future of Accedian solutions. It's an innovation platform, easily extended with new Virtual Network Functions (VNFs) from Accedian and best-in-class vendors. VNFs can be developed rapidly, then transparently distributed by the VCX.

Accedian will continue to introduce exceptional new monitoring capabilities on this platform, covering application-specific QoE, lossless remote packet brokering, sync monitoring and delivery, SLA-assured web-Application delivery, and more. VCX Controller is future-proofed-join us for the journey.

Multiple VCX appliances, whether physical or virtual, can be controlled concurrently by the SkyLIGHT services and orchestration Director- a unified migration of Accedian's Vision EMS and the V-NID Manager, integrating the V-NID Analyzer application and Vision SP automation capabilities within a single platform. Director capabilities extend to orchestrate standalone Performance Elements and legacy V-NID Actuators when installed in a hybrid deployment, providing a harmonized open API and a single pane of glass+interface to rapidly configure, automate, and visualize network performance assurance between diverse endpoints. A lossless telemetry method provides an assured, secure tunnel to modules, carrying control and synchronization messages, as well as VNF-specific traffic and metrics for results processing.

Network Performance Modules

Accedian performance modules combine small footprint & pluggable hardware with NFV-powered test control, computation, and analysis to bring standards-based+ performance assurance to all corners of the network.

The Nano smart SFP and the GbE ant Module share the same programmable processor & NFV-based functionality



Segment and Extend Full-Service Validation & Visibility from Core-to-Edge


Modules are cost effective enough that they can be installed at all key points along the service path to provide per-hop as well as end-to-end service visibility. A patented segmented test method provides per-segment results using a single test packet, eliminating errors in calculated results measured from test sessions.

Right-sized for cost-competitive small cell backhaul, cost-competitive vCPE and broadband business services applications, modules are fully interoperable with third-party test probes and handhelds, as well as standards-based network elements supporting Ethernet OAM (Y.1731, 802.3ag) and Layer 3 TWAMP (RFC-5357) performance monitoring (PM) protocols.


Accedian modules provide one-way latency measurements with exceptional precision, along with path-segmented metrics for rapid fault isolation.

Adding a performance module to legacy and enterprise-grade network elements, small cells or cable, FTTH or xDSL modems adds Ethernet OAM and PM feature support bringing ubiquitous QoS visibility to every service edge. Units can be installed in-line or out, ensuring they are never a single point of failure when installed in critical network locations.

With multiple, programmable feature banks, new capabilities can be loaded into modules remotely to keep pace with evolving standards and new applications. As VNFs evolve, Accedian performance modules will deliver complete Layer 2-7 visibility, while providing hardware-assist for critical edge functions in the smallest possible package.

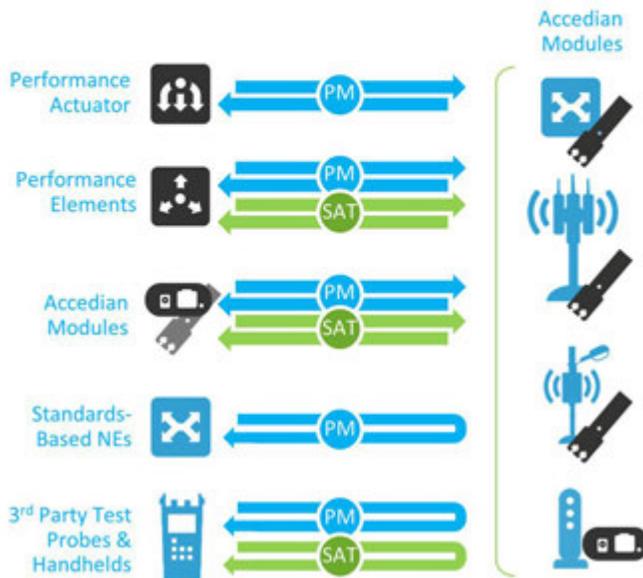

VCX as Physical or Virtual Appliance

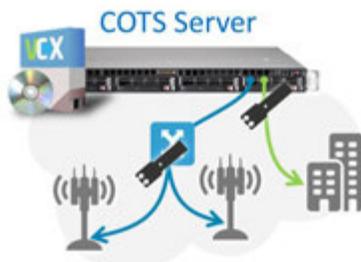

Flexible Deployment Options

The SkyLIGHT VCX can be deployed on hosted cloud resources running VMware ESXi or KVM hypervisors as a virtual appliance, or can be installed on commercial off-the-shelf (COTS) servers running the Ubuntu Linux O/S, offering providers a variety of highly scalable options that adapt to their existing compute resource strategies, including D-NFV deployment approaches. Accedian also offers a turn-key physical appliance version of the VCX Controller on company-supported and warranted hardware. These options, combined with support for distributed NFV deployment models, ensure capabilities scale economically as platform use increases.

Accedian's unique assured telemetry protocol ensures that remotely installed modules can reliably communicate with SkyLIGHT control, VNFs, and management tools. Performance assurance session control and results are transmitted in a secure, lossless manner. This capability means that NFV-based functions offer the same integrity, granularity, and precision as physical, standalone instrumentation.

SkyLIGHT VCX Controller Applications


Service Activation Testing

Unique to Accedian, Performance Modules are capable of full line-rate test traffic generation, able to create and analyze up to four unique flows, or run four concurrent RFC-2544 / Y.1731 service activation tests to multiple service endpoints. This allows service providers to test the actual service path at peak hours, without impacting the network more than the service itself would.



Distributed traffic generation can be easily orchestrated and automated by the SkyLIGHT Director platform or using an open API, permitting flexible site-to-site testing, on demand or triggered service validation and troubleshooting. Truck-rolls and on-site use of labor and test sets is eliminated with Modules customers can self-install, retained for their complementary performance monitoring capabilities once the service is activated. Limitations of head-end, probe-based solutions are also eliminated: high cost, network traffic load, scheduling limitations, and the inability to test directly between sites.

The VCX Controller assumes all session setup, control, sequencing functions, as well as results analysis and reporting. Modules respond to traffic generation commands (rate, number of packets, flow characteristics) to conduct tests, and pass base-level metrics back to the VCX for results processing.

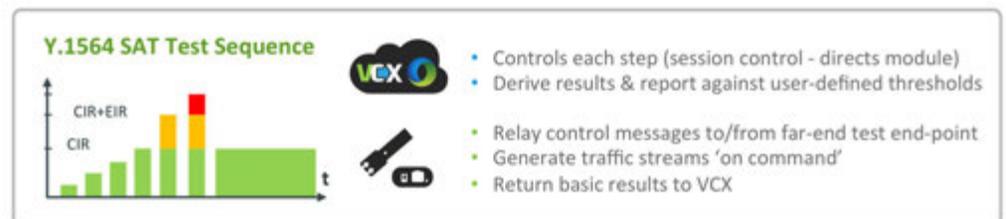


SAT tests can be conducted between a VCX-controlled Nano Module and a standalone Performance Element (vCPE) or any other standards-compliant test set or NID. To the far-end test device, the Module appears the same as any other standards-based test endpoint. Any SAT protocol messages received by the Module are mediated by the VCX.


details and alarms. The Modules minimize telemetry bandwidth by providing a certain degree of autonomous processing, by automatically responding to Ethernet OAM DMM delay measurement messages with the appropriate DMR message, for example.

PM Topologies

The VCX Controller can employ a Module as a virtual test actuator (probe), streaming thousands of sessions via a single unit, which time-stamps the test traffic at full wire-speed, whether installed in-line or out. Tests can also be conducted between units, or in a full mesh fashion, providing the ability to test multiple services and QoS levels between sites without costly per-location equipment.

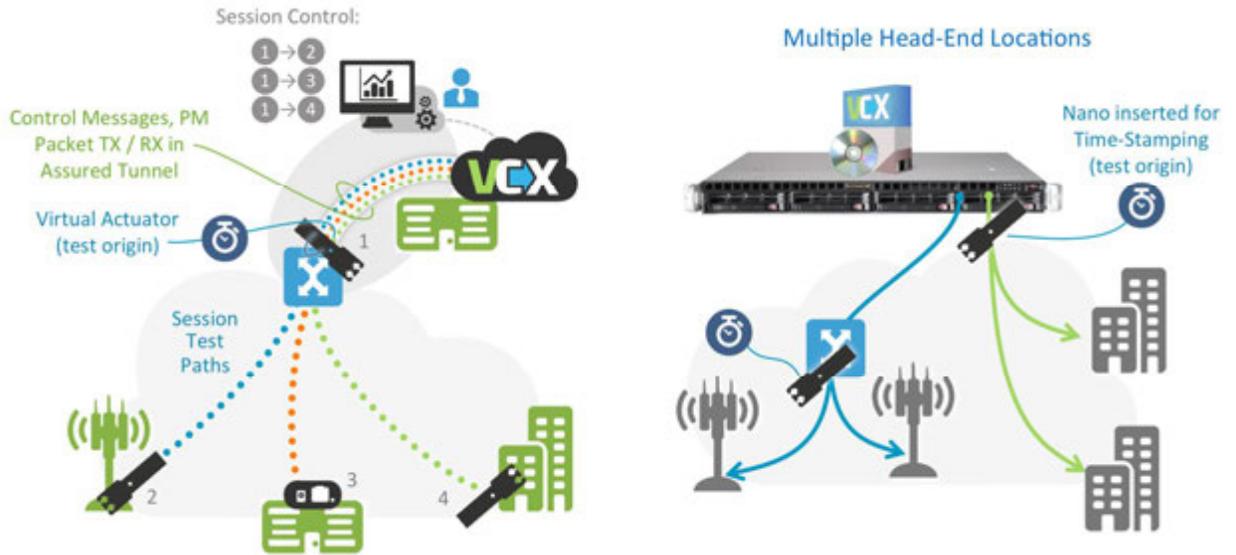

Centralized Testing: Virtual Actuator / Probe: diagrams only show one session between sites for the sake of clarity. Multiple head-end "probe" locations can be created by installing additional Modules where desired.

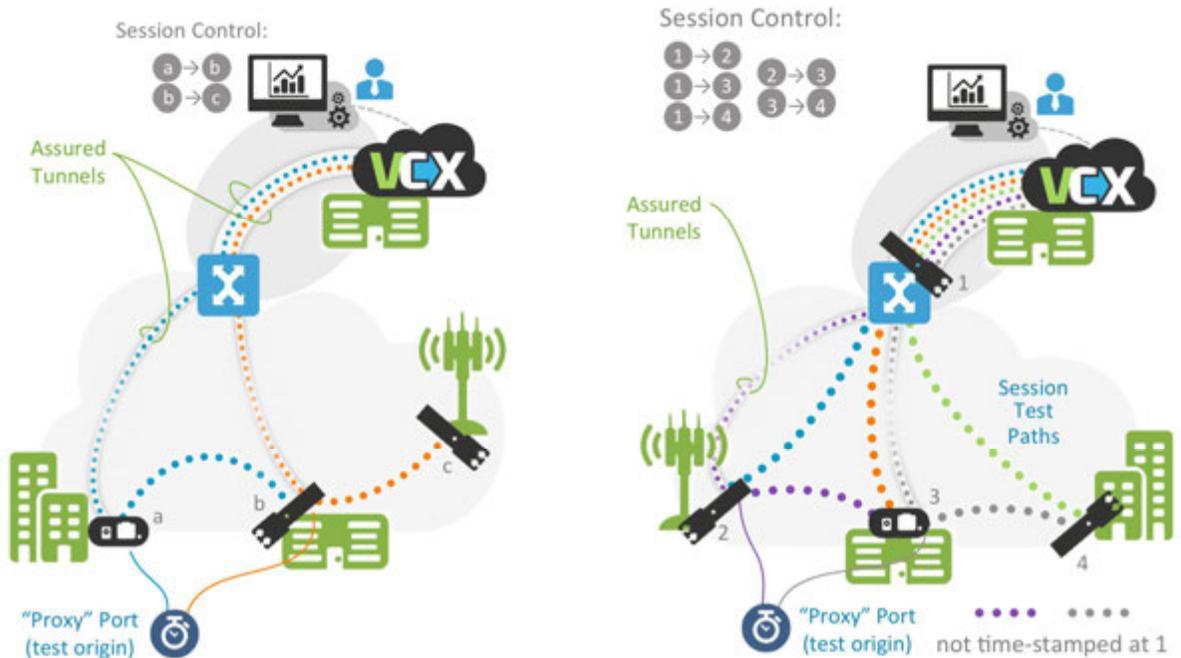

Site-to-Site & Full Mesh Testing: Remote PM Traffic Generation

Bandwidth Utilization

Bandwidth utilization, when precisely measured, can reveal transient micro-bursts leading to TCP throughput impairments. Per-service metering also permits usage-based billing, including on-demand and excess information rate (EIR) burst consumption pricing models.



Example of multi-service, multi-site utilization metering

The VCX Controller processes per-flow bandwidth utilization metrics from Modules under its control, using time-stamps to accurately report throughput as well as consumption. When used in conjunction with packet loss and other measurements, service providers can detect network bottlenecks and estimate available capacity. Key metrics to assure and enforce the delivery of offnet services. Upload and download usage statistics can be monitored separately. The VCX Controller can record granular utilization with per-second sampling.

Dynamic Performance Assurance for Dynamic Networks

Assuring Bandwidth-on-Demand & Elastic Cloud Services

Realizing the full potential of dynamic connectivity services controlled through customer portals, the open programmability of the SkyLIGHT VCX Controller provides dynamic performance assurance functionality that adapts to changing service attributes. Monitoring sessions can immediately be activated to assure new services, setting thresholds, alerts, and reporting consistent with customer QoS expectations and Service Level Agreements (SLAs).

Big Analytics Meets Network State+ Visibility

On-demand, all-layer real-time monitoring and remote packet capture can likewise be triggered via the VCX Controller's northbound interface (NBI) by third-party platforms, deep packet inspection (DPI) analyzers and network management systems to provide contextual, full-Layer, high-resolution visibility into suspected problem areas. Hundreds of comprehensive performance metrics and KPIs. the Network State+ provide the most granular, actionable performance feed for all facets of forensic diagnostics and trend analysis.

Having the right data at the right time is one key tool in rapid root cause determination and localization. The programmability of the VCX Controller makes this an integrated, automated part of existing troubleshooting and policy enforcement processes.

Learning More

Accedian® SkyLIGHT Controller provides an architecture that unifies physical and virtualized instrumentation, employing private cloud or COTS hardware-based NFVI to efficiently provide scale up to address national-scale network footprints.

For more information about using the VCX Controller in vCPE, mobile network monitoring, financial services and data center connectivity applications, consult our wide range of white papers, instructional videos, technology primers and other resources at Accedian.com/library

Solution scale, and sizing information is available on the SkyLIGHT VCX Controller Data Sheet & Dimensioning Guide, available directly from your Accedian sales professional.

Professional Services

We welcome service providers to the virtual world, and offer expert advice to help them make the smoothest transition to the significant cost savings and operational gains NFV-based virtualized instrumentation offers.

Accedian® PASSPORT Professional Services team assures successful deployments within existing operational practices and systems, with solution integration, networking engineering, analytics interpretation, and network optimization services adapted to each provider's particular needs.

Accedian Certified Engineers (ACE) are also MEF Carrier Ethernet Certified Professionals (CECPs), with extensive experience that has led Accedian to become known as the Network Performance Assurance Specialists.



© 2015 Accedian Networks Inc. All rights reserved.

Accedian Networks, the Accedian Networks logo, SkyLIGHT, ant MODULE, Vision EMS, Vision Suite, VisionMETRIX, Vision Collect, Vision Flow, Vision SP, V-NID, Plug & Go, R-FLO, Network State+, Traffic-Meter, & FlowMETER are trademarks or registered trademarks of Accedian Networks Inc. All other company and product names may be trademarks of their respective companies. Accedian Networks may, from time to time, make changes to the products or specifications contained herein without notice. Some certifications may be pending final approval. Please contact Accedian Networks for current certifications.